

BRUKSANVISNING INSTRUCTION MANUAL

TREND®

B E L Y S N I N G


ART NO.: 401018/401019/401020

220~240V/AC 50/60Hz
180mA 8W LED



SOLID OG STILIG DOWNLIGHT. DOWNLIGHTEN KAN DIMMES HELT NED FLIMMERFRITT.
LAV HØYDE.
EKSTERN DRIVER MED HURTIGKOBLING FOR RASKERE OG ENKLERE INSTALLASJON.
DIMBAR. 5 ÅRS GARANTI PÅ DRIVER!
ENKEL INSTALLERING. MONTERES UTEN VERKTØY.



SOLID AND CLASSY DOWNLIGHT. THE DOWNLIGHT CAN BE DIMMED COMPLETELY FLICKER-FREE.
LOW HEIGHT.
EXTERNAL DRIVER WITH QUICK CONNECTION FOR FASTER AND EASIER INSTALLATION.
DIMMABLE. 5 YEAR WARRANTY ON THE DRIVER!
EASY INSTALLATION. INSTALL WITHOUT TOOLS.








LED EFFEKT: 8W
LYSSTYRKE: 530LM
FARGETEMPERATUR: 2700K
LYS SPREDNING: 38°
VINKLING/TILT: 25°
TETTHETSGRAD: IP44
LEVERES MED DIMBAR DRIVER.

LED POWER: 8W
LUMINOUS EFFICIENCY: 530LM
COLOR TEMPERATURE: 2700K
BEAM ANGLE: 38°
TILT: 25°
IP RATING: IP44
DIMMABLE DRIVER INCLUDED.


INKLUDERT DIMBAR DRIVER/
INCLUDED DIMMABLE DRIVER.

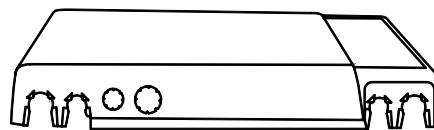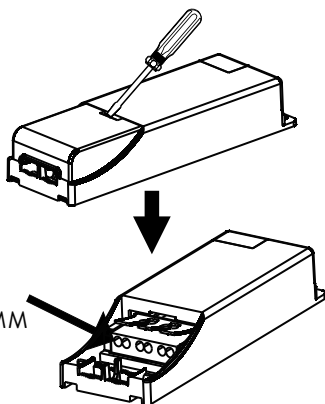



ART.: DOWNLIGHT BOX

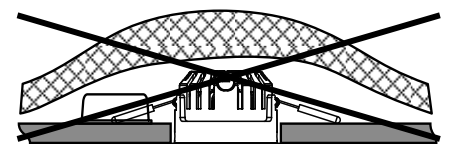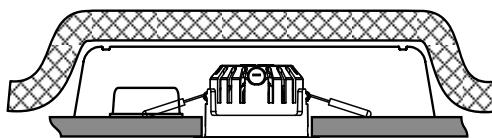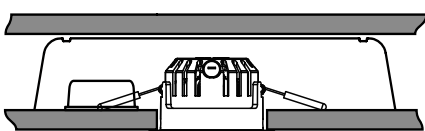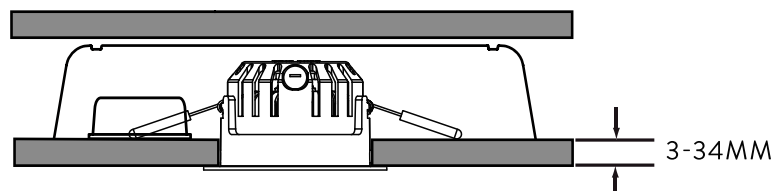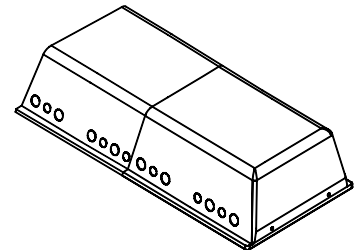


MÅL / MEASURES

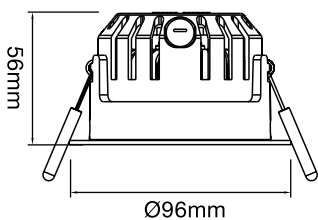

CUT OUT : Ø82-84MM

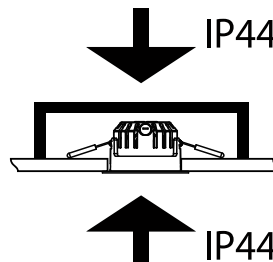

MINIMUM DISTANCE TO FLAMMABLE MATERIAL IN THE BEAM DIRECTION /
MINIMUM AVSTAND TIL BRENNBART MATERIALE I ARMATURETS STRÅLERETNING



IMPORTØR:
ELEKTRISK IMPORT AS
ETTERSTADGT.36 0658 OSLO
NORWAY

DISTRIBUTØR:
MEGAFLIS AS
BILLINGSTADSLETTA 14 1396 BILLINGSTAD
NORWAY