

BRUKSANVISNING INSTRUCTION MANUAL

ART NO.: 401031/401032/401033

TREND®


B E L Y S N I N G

2700K 300LM 220~240V
50/60Hz 100mA LED 5W IP44



SOLID OG STILIG DOWNLIGHT. DOWNLIGHTEN KAN DIMMES HELT NED FLIMMERFRITT.
LAV HØYDE.
EKSTERN DRIVER MED HURTIGKOBLING FOR RASKERE OG ENKLERE INSTALLASJON.
DIMMBAR. 5 ÅRS GARANTI PÅ DRIVER!
ENKEL INSTALLERING. MONTERES UTEN VERKTØY.

SOLID AND CLASSY DOWNLIGHT. THE DOWNLIGHT CAN BE DIMMED COMPLETELY FLICKER-FREE.
LOW HEIGHT.
EXTERNAL DRIVER WITH QUICK CONNECTION FOR FASTER AND EASIER INSTALLATION.
DIMMABLE. 5 YEAR WARRANTY ON THE DRIVER!
EASY INSTALLATION. INSTALL WITHOUT TOOLS.





LED EFFEKT: 5W
LYSSTYRKE: 300LM
FARGETEMPERATUR: 2700K
LYS SPREDNING: 38°
VINKLING/TILT: 25°
TETHETSGRAD: IP44
LEVERES MED DIMMBAR DRIVER.


5W
300LM
2700K
38°
25°
IP44

LED POWER: 5W
LUMINOUS EFFICIENCY: 300LM
COLOR TEMPERATURE: 2700K
BEAM ANGLE: 38°
TILT: 25°
IP RATING: IP44
DIMMABLE DRIVER INCLUDED.

INKLUDERT DIMMBAR DRIVER/
INCLUDED DIMMABLE DRIVER.

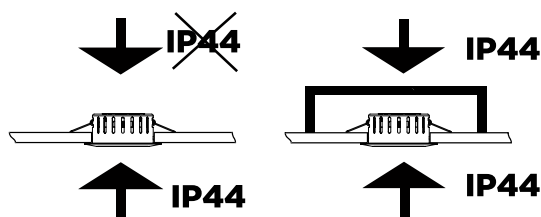
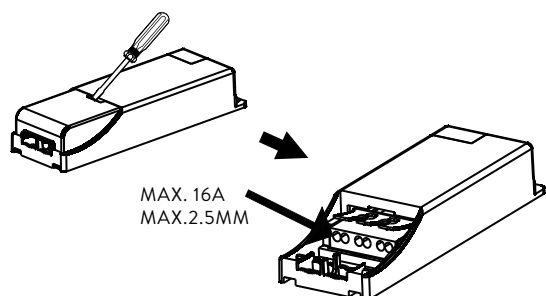


MÅL / MEASURES

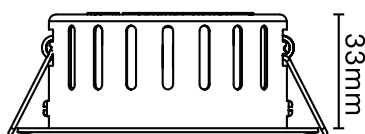

Ø: 87mm

CUT OUT : Ø75MM

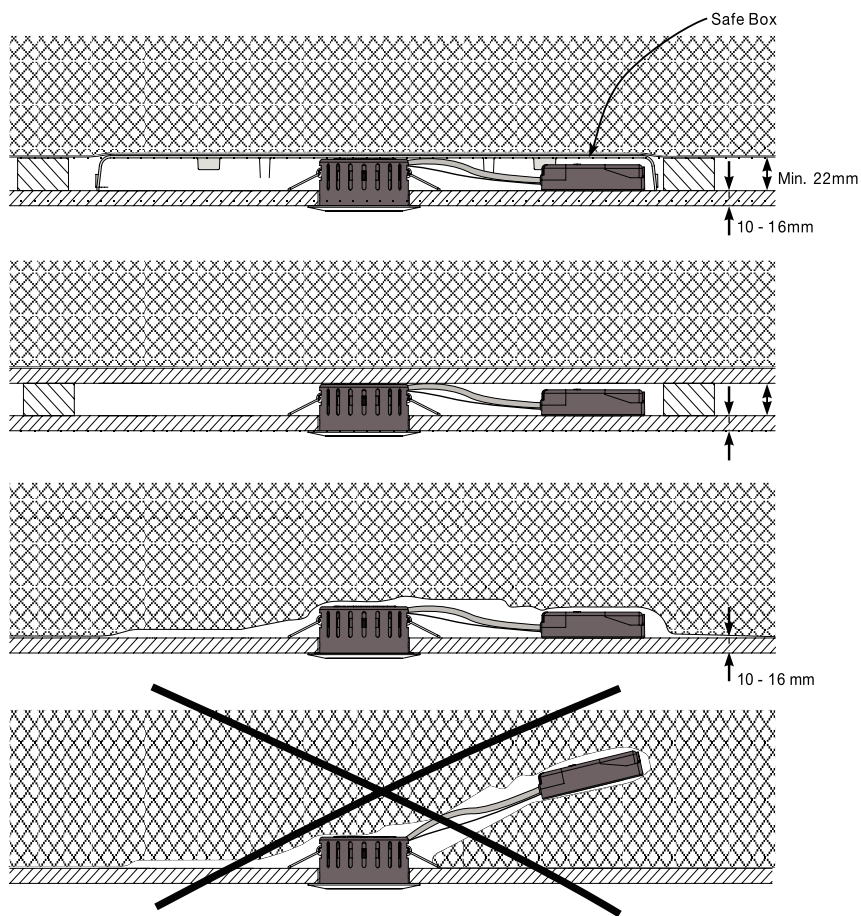

MINIMUM DISTANCE TO FLAMMABLE MATERIAL IN THE BEAM DIRECTION / MINIMUM AVSTAND TIL BRENNBART MATERIALE I ARMATURETS STRÅLERETNING

IMPORTØR:
ELEKTRISK IMPORT AS
ETTERSTADGT.36 0658 OSLO
NORWAY

DISTRIBUTØR:
MEGAFLIS AS
BILLINGSTADSLETTA 14 1396 BILLINGSTAD
NORWAY