


LUNA INSTRUCTION MANUAL

ART NO.: 401034/401035/401036

TREND®

B E L Y S N I N G

2000K-3000K Ra90 400LM 220~240V
50/60Hz 140mA LED 6W IP44




kan brukes utendørs under tak



SOLID OG STILIG DOWNLIGHT. DOWNLIGHTEN KAN DIMMES HELT NED FLIMMERFRITT.
LAV HØYDE.
EKSTERN DRIVER MED HURTIGKOBLING FOR RASKERE OG ENKLERE INSTALLASJON.
DIMMBAR. 5 ÅRS GARANTI PÅ DRIVER!
ENKEL INSTALLERING. MONTERES UTEN VERKTØY.

SOLID AND CLASSY DOWNLIGHT. THE DOWNLIGHT CAN BE DIMMED COMPLETELY FLICKER-FREE.
LOW HEIGHT.
EXTERNAL DRIVER WITH QUICK CONNECTION FOR FASTER AND EASIER INSTALLATION.
DIMMABLE. 5 YEAR WARRANTY ON THE DRIVER!
EASY INSTALLATION. INSTALL WITHOUT TOOLS.






LED EFFEKT:
LYSSTYRKE:
FARGETEMPERATUR:
LYS SPREDNING:
VINKLING/TILT:
TETHETSGRAD:
LEVERES MED DIMMBAR DRIVER.

6W
400LM
2000K-3000K
40°
25°
IP44


LED POWER:
LUMINOUS EFFICIENCY:
COLOR TEMPERATURE:
BEAM ANGLE:
TILT:
IP RATING:
DIMMABLE DRIVER INCLUDED.

6W
400LM
2000K-3000K
40°
25°
IP44

INKLUDERT DIMMBAR DRIVER/
INCLUDED DIMMABLE DRIVER.

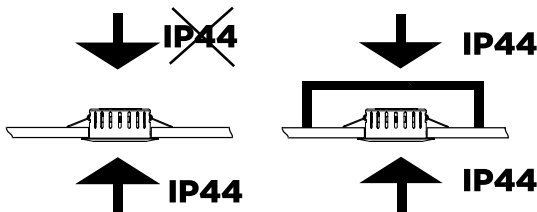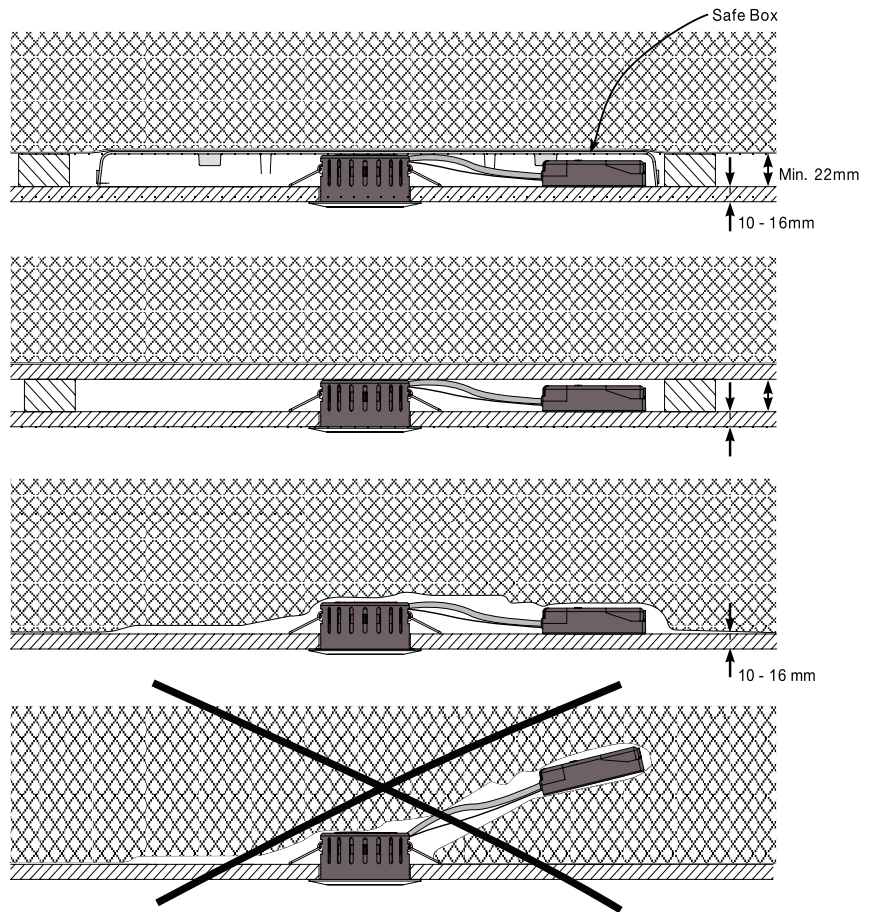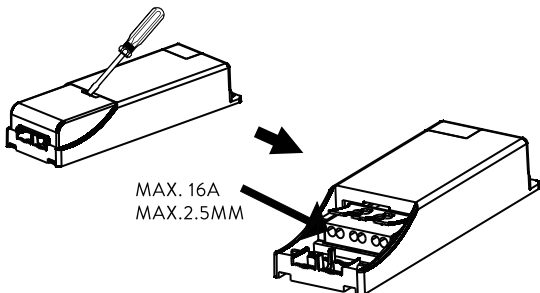

MÅL / MEASURES

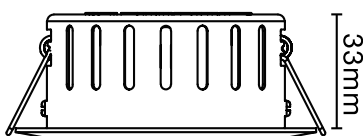

Ø: 87mm

CUT OUT : Ø75MM



MINIMUM DISTANCE TO FLAMMABLE MATERIAL IN THE BEAM DIRECTION / MINIMUM AVSTAND TIL BRENNBART MATERIALE I ARMATURETS STRÅLERETNING

IMPORTØR:
ELEKTRISK IMPORT AS
ETTERSTADGT.36 0658 OSLO
NORWAY

DISTRIBUTØR:
MEGAFLIS AS
BILLINGSTADSLETTA 14 1396 BILLINGSTAD
NORWAY