

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.



SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSPAA 40 PA	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSP.. 40 PA	40

SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - bar length 90 cm - pack. 20 Pcs



SELF
PACK

Article	L mm
PNSPAA 409 PAS	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs



SELF
PACK

Article	L mm
PNSP.. 409 PAS	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs



SELF
PACK

Article	L mm
PNSPAA 4010 PAS	40

SILVER ANODIZED ALUMINUM with ADHESIVE
- thermo packed - bar length 1 lm - 20 Pcs




SELF
PACK

Article	L mm
PNSP.. 4010 PAS	40

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES

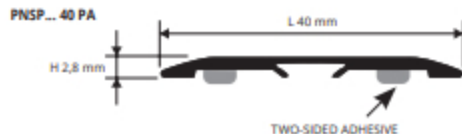

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 40" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles