



ZERO CURVE

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

transition profiles

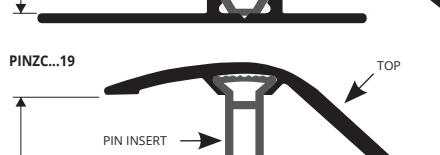

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19 (top PINZ... 15+ PIN 19)	18 / 20

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19S (top PINZ... 15+ PIN 19)	18 / 20

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19 (top PINZ... 15+ PIN 19)	18 / 20

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(80 wooden finishes of which 49 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)




Article	H mm
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17
PINZC... 19S (top PINZ... 15+ PIN 19)	18 / 20

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND



On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.