

Install method

- ### Drawing the position of mounting holes

 - According to the installation position, put the mounting plate with one hand gently holding in the place which the machine will be installed. Then use the other hand to draw the positions of mounting holes in pencil or draw them directly according to the size.
- ### Drilling holes

 - In accordance with the drawn holes position, drill four holes 6 mm in diameter and press the expansion pipes into four holes location.
- ### Fixing the mounting plate

 - Direct the installation holes of the installation panel at the expansion pipes and fix them with self-threading cross screws.
- ### Installing the machine

 - The mounting plate has protrudent hooks formed for inserting into the slots to hang the machine on it. Press down the machine until the anti-theft screw holes on machine and mounting plate are aligned.
- ### Fixing anti-theft screws

 - Screw anti-theft bolts in the bolt holes to fix the machine on the mounting plate.
 - Install the air intake grill in the machine and make sure the grill is locked.

Test run

Steps	Confirm information	Check & Notice
1 Shake the machine gently	The machine is installed firmly without shaking	It will occur shaking and noise when the machine doesn't install firmly
2 Confirm the power and voltage	Please use the rated Voltage	It will burn out machines or cause human accidents if the power use incorrect
3 Switch on the power	Close external power supply switch or insert the power plugs	Power socket must be match the machine plug Please check the power when the indicator light not bright
4 Slid in your hands to drying	High speed wind blow out	Please confirm whether your hands are far away from the sensor parts if there is no wind blowing out

Daily use and maintenance

External maintenance

- Screw with a soft dry cloth or towel Sassafras. Please use neutral detergent. Please don't use organic solvents, acid or alkali toilet cleaner, cleaning brush etc.
- Otherwise, the machine will destroy machine surface finish or produce discoloration.
- If using a chemical cloth, make sure that the use of attention.

Usage instructions

- Slowly moving up the back of the hand before and after
- Palm of the hand before and after slowly moving upwards
- Mutual hands

Packing list

main machine	1	User manual	1
5×25mm self tapping screw	4		
5mm expansion pipe	4		

HAND DRYER

USER MANUAL

2805SM004-V2.1

Specification

Voltage	AC220-240V~	Motor	Brush motor
Phase	Single-phase	Sensing distance	15-20cm
Input	1150-1350W	Protection class	IPX1
Wind speed	68m/s	Appearance size	280x153x162mm
Heating power	650-750W	N.W	3.4kg

WARNING

If you don't use this unit properly or follow the safety guidelines care fully. It would lead to serious personal injury or property damage

- Do not open the front panel. Otherwise, This may get an electric shock
- Do not let children hang from the unit. otherwise, this may cause the unit to drop.
- Do not allow the unit get wet. otherwise, it will cause electric shock
- Do not use in a wet environment, for example, near the bathroom where it may get the direct water and the places where the condensation may form. otherwise, this may cause electric shock and unit malfunction.
- Do not modify and disassemble the unit unnecessarily. Otherwise, this may cause a fire, electric shock, or personal injury.
- Rated power is required
- If power tolerance is over +/-10%, there will be breakdown. If using incorrect power supply, fire, electric shock and machine malfunction will happen.
- Please use dedicated socket
- If using together with other appliances, the socket may cause abnormal heat leading to fire.
- Power must be cut off when maintenance to prevent the risk of electric shock. Air filter must be installed.
- If the machine doesn't work or have abnormal conditions, please cut off power to prevent accidents, and close leakage circuit breaker and ask supplier to check and repair, or it may lead to fire because of electricity leakage and short circuit.
- Machine must have reliable ground connection.
- Attention when installation:
 - Do not install when the machine are power connected.
 - This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
 - If the cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
 - For additional protection, the installation of a residual current device (RCD) having a rated residual operating current not exceeding 30mA is advisable in the electrical circuit supplying the bathroom. Ask your installer for advice.




- Environmental Protection
- Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.


Feature

- No touch hand drying ensures complete hygiene
- No need paper towels, ease of maintenance
- Stainless steel shell, solid and beautiful
- Auto-stop function. the built-in timer will stop the unit after 45 seconds.
- The machine equipped with automatic heating system, when temperature was cold, automatically open the heating system, when the temperature was hot, the heating system, automatic shutdown.

Name of each part

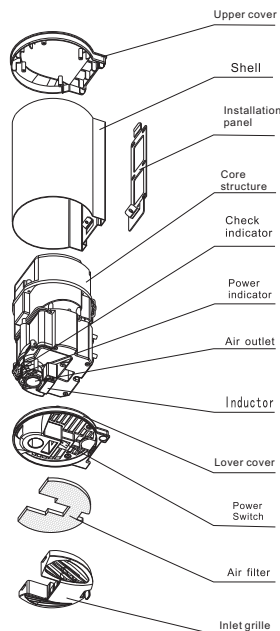


Electrical diagram

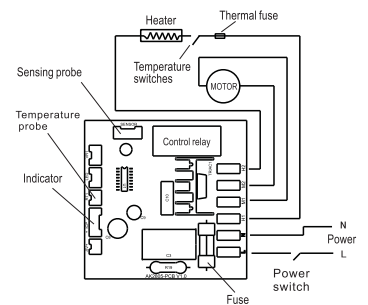

Precautions before installation and Installation location

- Do not install in the following places (otherwise may cause malfunction).
 - Place with temperature below -10°C or over 40°C
 - Place directly sprinkled by water
 - Place with direct sunlight, strong light
 - Place easy for condensation
 - Place filled with corrosive, oxidizing and reducing gas
 - Place with altitude over the range of 0-2000m
- Installation location
 - The following picture shows the recommended location. (If there is floor or obstacles below the hand dryer, the distance between machine and floor or obstacles should be at least 400mm.)
 - Keep the right side of dryer away from mirror or wall for the water droplets may splash out when you dry hands. (the distance should be 100mm above)
 - Please avoid the place easy to meet people and easy to encounter doors.
 - Please select flat wall to install this product.

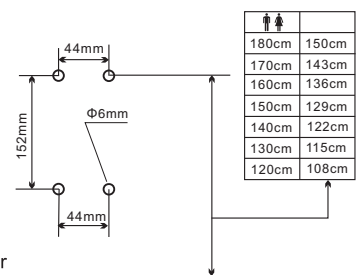

• Power cord should be 1.0mm²-1.5mm²